
			SP70 PLATFORM	SA75 4-SECTION	SL75 LADDER	SL104 LADDER	SL100 LADDER	SLR75 LADDER	SLR108 LADDER
	151	(A)	17 5/8"	17 1/2"	28 1/2"	28 1/2"	28 1/2"	24 1/2"	24 5/8"
HEIGHT	210	(B)	16"	16"	25 1/2"	25 1/2"	25 13/16"	21 3/4"	22"
ПЕІВПІ	340	(C)	14"	14"	22 1/2"	22 1/2"	22 5/8"	18 1/2"	18 5/8"
	41H	(D)	12*	12"	19 1/2"	19 1/2"	19 5/8"	n/a	15 5/8"
	5™	(E)	n/a	n/a	n/a	n/a	16 13/16"	n/a	n/a
	151	(F)	33 3/8"	33 3/8"	33 3/8"	33 3/8"	38 5/8"	33 5/8"	38 5/8"
WIDTH	2№	(G)	29 1/2"	29 1/2"	29 1/2"	29 1/2"	34 3/4"	29 3/4"	34 1/4"
"וטוח	340	(H)	26 1/4*	26 1/4"	25 1/2"	25 1/2"	31 1/4"	25 7/8"	30 7/8"
	41H	(1)	22 7/8"	22 7/8"	22 1/2"	22 1/2"	27 3/4"	n/a	27 1/2"
	5™	(J)	n/a	n/a	n/a	n/a	24 1/8"	n/a	n/a

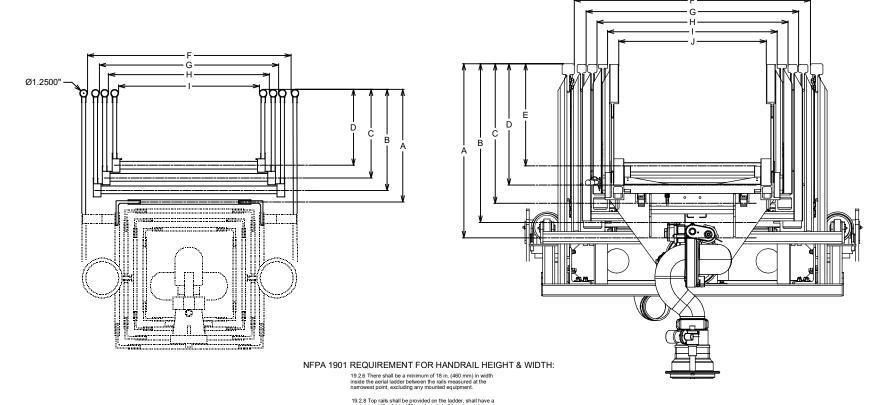

19.2.8 Top rails shall be provided on the ladder, shall have a minimum width of 1 in. (25 mm), and shall be at a minimum height of 12 in. (300 mm) above the centerline of the rungs, excluding the outermost two rungs of the outermost ity section.

## SA75 and SL100 CROSS SECTIONS SHOWN

R										grice and a	SUIPHEN IOWERS INCORPORATED 4500 SUIPHEN COURT (614)876-1262 HILLIARD, OHO 43026 (614)876-3073 (FAX)			
E V - S -	CO	JRG	10/18/2018	ADDED SLR75 AND SLR108. UPDATED NFPA REFERENCE								AERIAL HANDRAIL WIDTHS AND HEIGHTS		
0 2 0	B.0	JRG							Proprietary data is included in the information disclosed herein and is the sole property of SUTPHEN TOWERS INCORPORATED. This information is	DRN BY DATE	SIZE	SCALE	DWG NO.	REV
,	A.0	JRG	3/21/2012	ADDED SL100 AND UPDATED TO NFPA 1901-2009 VERBIAGE					submitted in confidence and neither this document nor the information disclosed herein shall be reproduced or transferred to other documents or disclosed to others for manufacturing or for any other purpose except	JGARVER 2-APR-93 CHKD BY DATE	C NTS	11B0119	C.0	
	REV BY DATE		DATE	DESCRIPTION		REV BY	DATE	DESCRIPTION	as specifically authorized in writing by SUTPHEN TOWERS INCORPORATED.			SHEE		SHEET 1 OF 1